
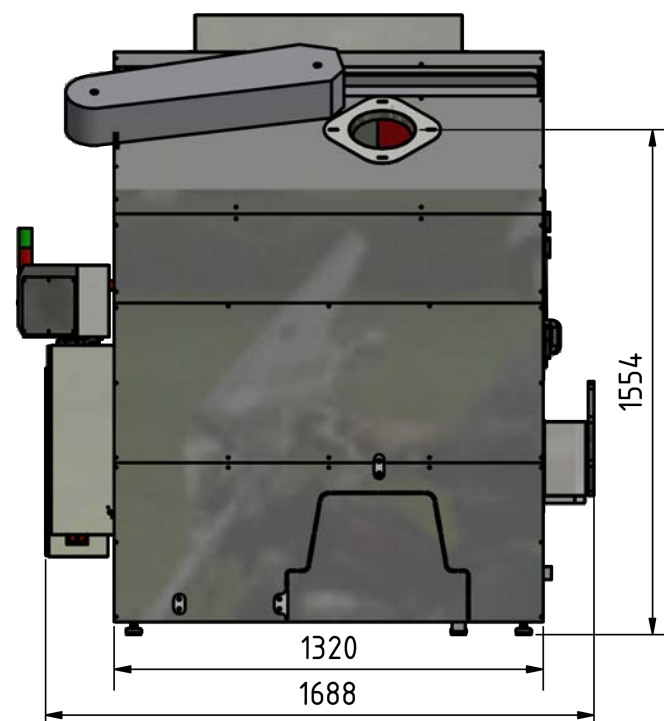


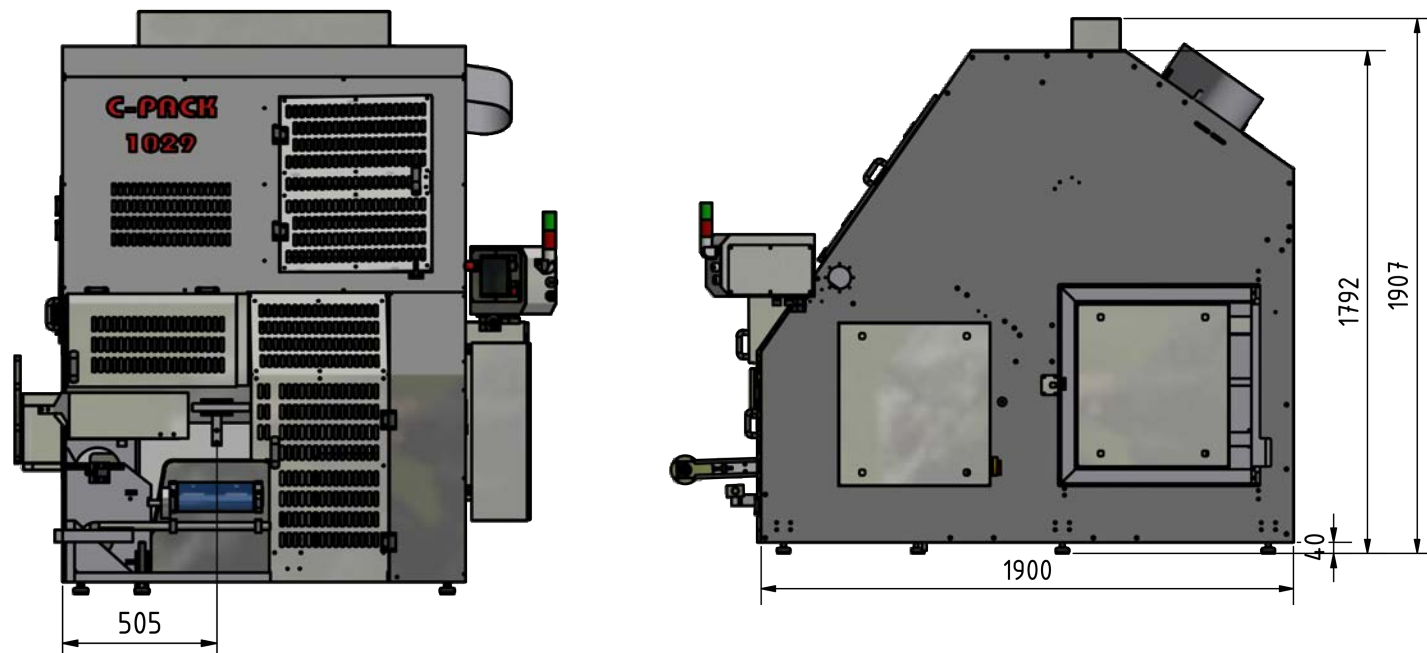

Technical data:

Performance:

max. 50 packages/min, depending on product and infeed system

Power supply:

400/230 Volt N/PE, 50/60 Hz, approx. 2.0 kW (other connections on request)

Machine weight:

approx. 950 kg

Package weights:

0.2 – 5,0 kg (depending on size of product)

Labelling:

Optional wineglas and clip2clip

Clipping strip:

thickness: 0.35 – 0.45 mm width : 5 mm

Required Net Material:

Woven or extruded

Outer net tube diameter:

available from 120 to 250 mm

Infeed height:

1554 mm

Standard equipment:

- Automatic net loading system
- Automatic Tube Change
- adjustable net length
- Touchscreen Display
- automatic Clip head lubrication
- fast unlock system of clip head
- inside illumination
- 40 mm CP 22 Clip head for tight net bags

Options:

- label transporting units
- printers

C-PACK

Verpackungsmaschinen GmbH

Kleiner Moorweg 34
25436 Tornesch - Germany

Tel: +49-4122-51173

Fax: +49-4122-55647

e-mail: c-pack@c-pack.com

Internet: www.c-pack.com



C-PACK

VAC 1029



C-PACK

Verpackungsmaschinen GmbH

Kleiner Moorweg 34
25436 Tornesch - Germany

Tel: +49-4122-51173


Fax: +49-4122-55647

e-mail: c-pack@c-pack.com

Internet: www.c-pack.com

C-PACK

VAC 1029

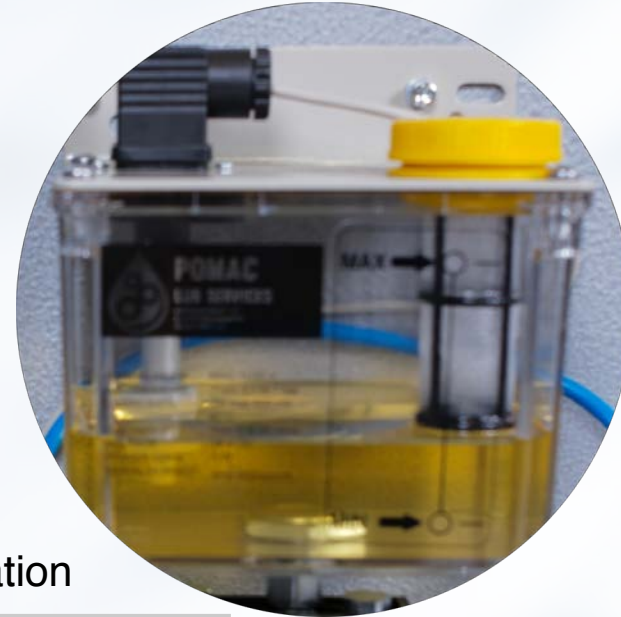

automatic lubrication



touchscreen



quick opening



automatic net refilling

